

AUTOMATIC DOOR BOTTOMS

MORTISE

All Products on This Page:



- Use With a Threshold for Maximum Sealing Capability
- Nylon Brush Recommended for Carpet Applications Where No Threshold is Provided
- Specify Exact Net Length Required to Avoid Field Sizing
- ADB's from 12" to 18" Can be Cut Down ½". ADB's 20" and Over Can be Cut Down up to 1½"
- End Caps Furnished Standard
- Furnished ½" Shorter Than Ordered to Fit Within Net Door Size (i.e. 36" is Furnished 35½")

335NA

Mill Aluminum Mortise Automatic Door Bottom with Neoprene Seal



335NA Neoprene




BHMA certified to ANSI/BHMA A156.22, 1,000,000 cycle test-grade 1

335SA Silicone



BHMA certified to ANSI/BHMA A156.22, 1,000,000 cycle test-grade 1

Mortise Required
5/8" x 1½"

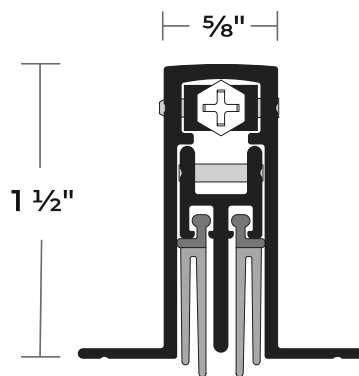

Available 11" to 60" in Length
Fits Wood Fire Door Mortise Restrictions

225NA

Neoprene
BHMA certified to ANSI/BHMA A156.22, 1,000,000 cycle test-grade 1

225SA Silicone




BHMA certified to ANSI/BHMA A156.22, 1,000,000 cycle test-grade 1

225WHA

Nylon Brush
BHMA certified to ANSI/BHMA A156.22, 1,000,000 cycle test-grade 1

Mortise Required
5/8" x 1½"

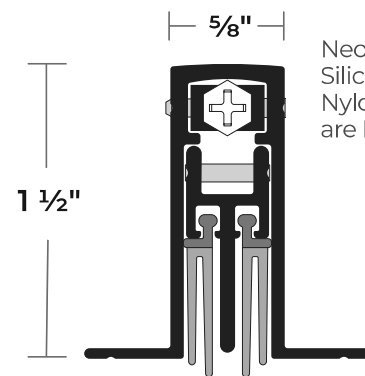

Neoprene, Silicone & Nylon Brush are Black


Available 11" to 60" in Length
Fits Wood Fire Door Mortise Restrictions

HOLLOW METAL DOORS

- Fits in 1½" x ¾" Channel. A "Furring Strip" May Be Used to Lower Automatic Door Bottom When a Deeper Channel is Used
- Furnished ½" Shorter Than Ordered to Fit Within Net Door Size (i.e. 36" is Furnished 35½") Length May Be Field Cut up to 1½"
- 5/8" Max Drop
- Fire Ratings Apply to Metal Doors Only
- #6 x ½" Tek Screws Furnished
- End Caps Not Available
- Available 12" to 60" in Length

320SA

Clear Anodized Aluminum Automatic Door Bottom for Hollow Metal Doors with Silicone Seal

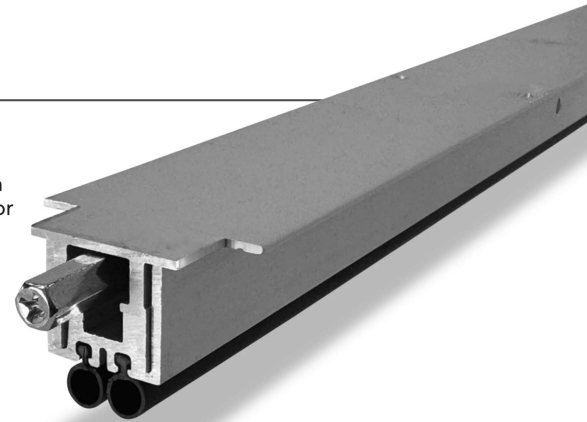

320NA Neoprene

320SA Silicone

320VA Vinyl

