



130NSS, 122NSS

Stainless Steel Neoprene Perimeter Seal

PRODUCT CUT SHEET

Material

Stainless Steel Type 304
Synthetic EPDM Rubber in Polypropylene Thermoplastic Matrix
Closed Cell Advanced Elastomeric Foam
Color is Black

- ▶ Very Good Abrasion Resistance, Tensile Strength and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -81°F to 275°F
- ▶ Good Resistance to Ozone, Sunlight and Aging
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ #6 x 3/4" Stainless Steel SMS Furnished
- ▶ Screw Holes Slotted for Adjustment

Finishes



Brushed #4 Finish (US32D, 630)

122NSS Microcellular EPDM

130NSS Microcellular EPDM



PROJECT:
SUBMITTED BY:
DATE:
NOTES:

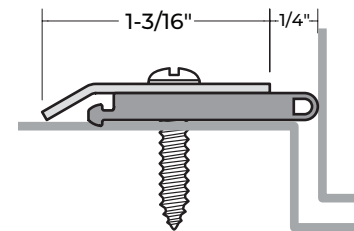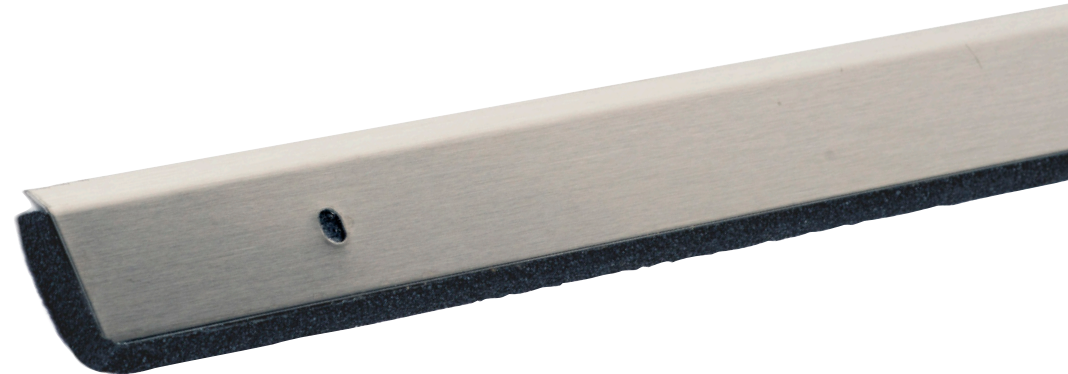

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com

NGP-GKT-130NSS-PCS-1223-A

ngp.com
1-800-NGP-RUSH