



137S

Silicone Dense Bulb Seal

PRODUCT CUT SHEET

Material


Aluminum Alloy 6063, T5 Temper
Synthetic Rubber Polymer: Siloxane
Dense Silicone is Black

- Excellent Flexibility and Memory
- Flame-Resistant
- Moisture-Resistant
- Temperature Range -100°F to 500°F, Remains Flexible at Extreme Temperatures
- Excellent Resistance to Ozone, UV and Aging
- Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold, Air Infiltration and Smoke Infiltration
- #6 x 3/4" Stainless Steel SMS Furnished
- Screw Holes Slotted for Adjustment

Finishes

137SA Anodized Aluminum
137SDKB Dark Bronze

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

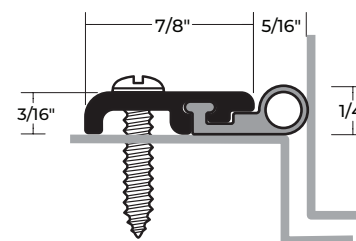

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH

NGP-GKT-137S-PCS-1123-A