




# 17

## Aluminum Rain Drip Guard

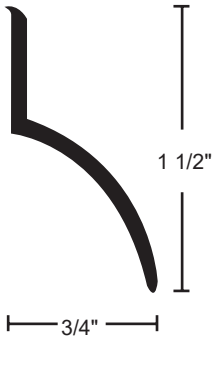

- ▶ Aluminum Alloy 6063, T5 Temper
- ▶ 3/4" Wide x 1 1/2" Tall
- ▶ #6 x 3/4" Stainless Steel SMS Furnished
- ▶ Screw Holes Slotted For Adjustment



**ngp.com**  
**1-800-NGP-RUSH**

FAX:  
(800) 255-7874

QUOTES:  
[quotes@ngp.com](mailto:quotes@ngp.com)



---


## INSTALLATION INSTRUCTIONS

---

Typical installation is to exterior face of frame header. Can also be applied to exterior face of door at sill.

Length of Rain Drip Guard should extend beyond width of door. Install full width of frame header if possible.

1. Mark hole locations.
2. Drill pilot holes for screws using a  $\frac{7}{64}$ " bit.
3. Fasten screws, working from one end to the other.
4. Caulk top edge of drip strip and around each screw to prevent water penetration.

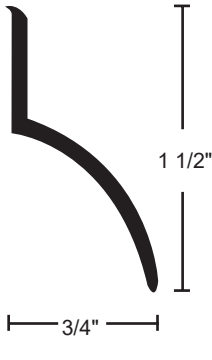

**ngp.com**

**1-800-NGP-RUSH**

**MEMPHIS**

4985 East Raines Road  
Memphis, TN 38118

**CARSON CITY**

3689 Arrowhead Drive

Carson City, NV 89706

[quotes@ngp.com](mailto:quotes@ngp.com)

[orders@ngp.com](mailto:orders@ngp.com)